

Notes:

Material: Shell: Steel, Nickel Plate.
 Insulator: Glass Filled LCP
 Contacts: Phosphor Bronze

Finish:
 Contact Area: Gold Plate over Nickel Plate
 on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications


Rated Voltage: 30V AC (rms)
 Contact Current Rating: 1.5 Amp
 Contact Resistance: 30 milliohms Max.
 Dielectric Withstanding: 100V AC
 Operating Temperature: -30°C to 85°C

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

| | | | |
|---|---------------------------|--------------------|------------|
| KEYSTONE ELECTRONICS CORP. | | | |
| www.keyleco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900 | | | |
| PART NAME | | MICRO USB SMT PLUG | |
| MATERIAL | | AS NOTED | |
| FINISH | AS NOTED | DRN BY | DATE |
| | | NT | 11.18.09 |
| TOLERANCES | INCH [MM] | CODE | DWG NO. |
| DECIMAL | $\pm .005$ [± 0.13] | App'd | SCALE |
| ANGULAR | $\pm 1^\circ$ | | 6X |
| UNLESS OTHERWISE SPECIFIED | | | |
| | | | 940 |

| | | |
|------|-------------|------|
| DATE | DESCRIPTION | REV. |
| | | |

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

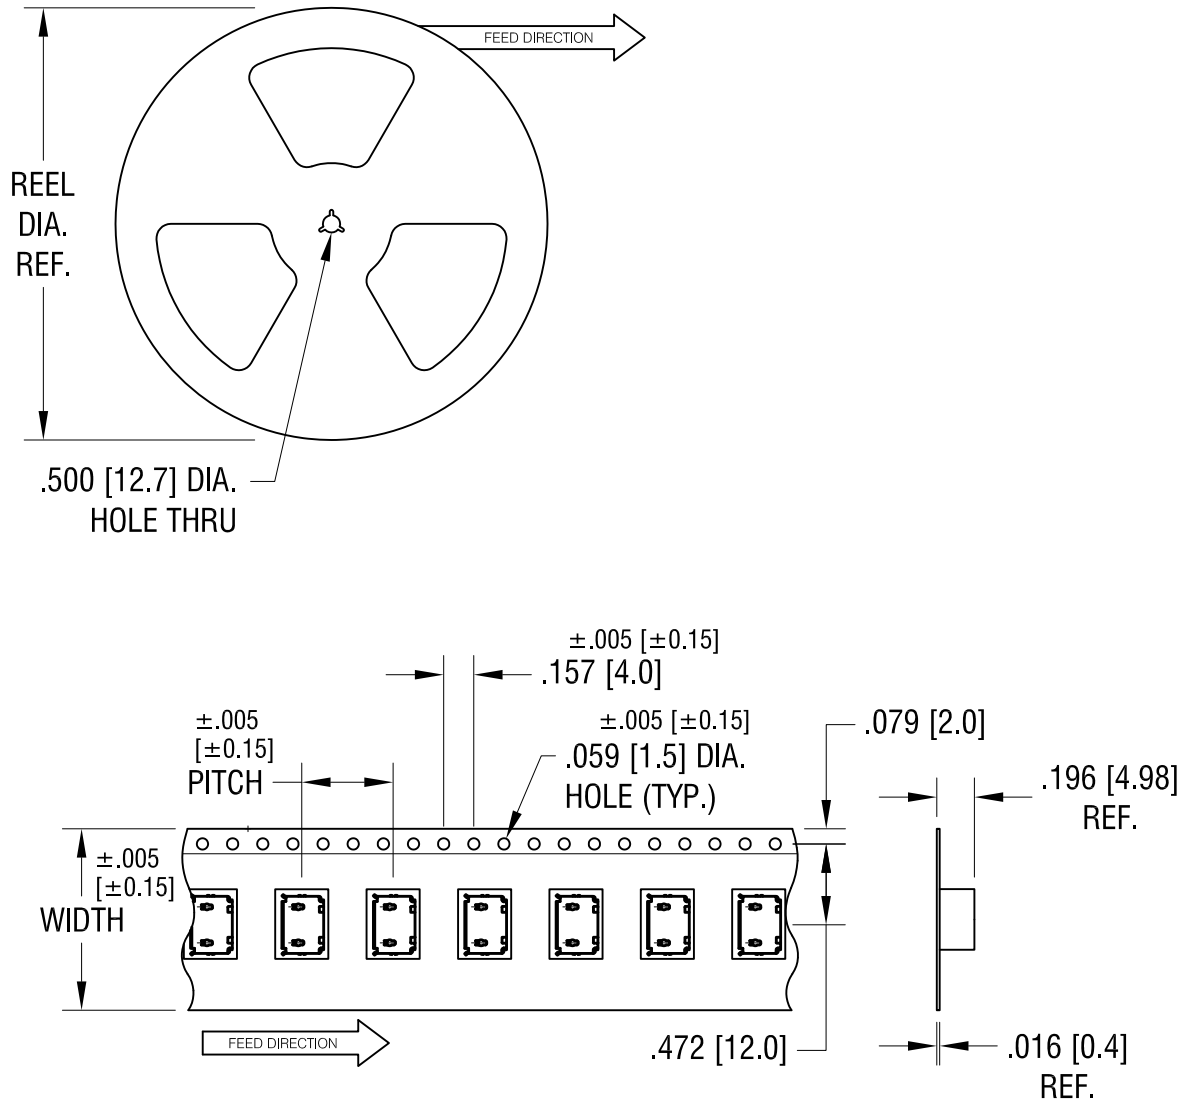

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
.945 [24.0] WIDE; .473 [12.0] PITCH

2. REEL:

13.0 [330] DIA. 1000 PIECES OF
PART NO. 940 PER REEL.

| | | | |
|---|---------------------------|--------------------------|--------------|
| KEYSTONE ELECTRONICS CORP. | | | |
| www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900 | | | |
| PART NAME | | USB MICRO SOCKET ON TAPE | |
| MATERIAL | | AS NOTED | |
| FINISH | | DRN BY | DATE |
| AS NOTED | | NT | 11.19.09 |
| | | APP'D | SCALE |
| | | | 1X |
| TOLERANCES | INCH [MM] | CODE | DWG NO. |
| DECIMAL | $\pm .015$ [± 0.38] | C/M | 940TR |
| ANGULAR | $\pm 1^\circ$ | | |
| UNLESS OTHERWISE SPECIFIED | | | |

| | | | |
|------|-------------|------|--|
| DATE | DESCRIPTION | REV. | |
|------|-------------|------|--|