


## EXTERNAL THREAD



.175 (4.5)  
Plug




### MATERIAL:

**Spring:** Beryllium Copper  
**Body:** Brass, Nickel Plate

**CAT. NO. 652**



.175 (4.5)  
Plug



### MATERIAL:


**Spring:** Beryllium Copper  
**Body:** Brass, Nickel Plate

**CAT. NO. 653**

## STANDARD RIVET



.175 (4.5)  
Plug



### MATERIAL:

**Spring:** Beryllium Copper  
**Body:** Brass, Nickel Plate


| CAT. NO. | L          |
|----------|------------|
| 552-3    | .187 (4.7) |
| 552-4    | .218 (5.5) |

## STANDARD SOLDERLESS

### SOLDERLESS CONNECTION



.175 (4.5)  
Plug

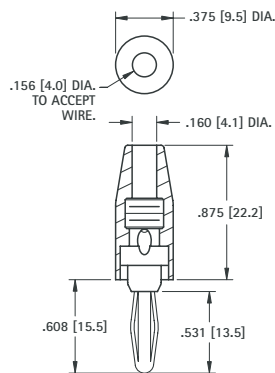

### MATERIAL:


**Spring:** Nickel Silver  
**Body:** Brass, Nickel Plate  
**Handle:** Nylon

| CAT. NO. | COLOR |
|----------|-------|
| 6078     | RED   |
| 6079     | BLACK |

### SOLDERLESS WITH SET SCREW



.175 (4.5)  
Plug

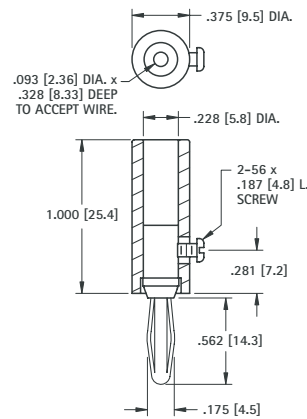

### MATERIAL:


**Spring:** Nickel Silver  
**Body:** Brass, Nickel Plate  
**Handle:** Nylon

| CAT. NO. | COLOR |
|----------|-------|
| 6084     | RED   |
| 6085     | BLACK |

### SOLDERLESS CONNECTION



.175 (4.5)  
Plug

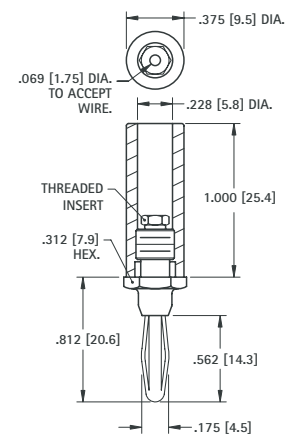

### MATERIAL:


**Spring:** Nickel Silver  
**Body:** Brass, Nickel Plate  
**Handle:** Nylon

| CAT. NO. | COLOR |
|----------|-------|
| 6082     | RED   |
| 6083     | BLACK |

## INTERNAL THREAD



Supplied with screw and lug  
Unassembled



### MATERIAL:


**Spring:** Phosphor Bronze (Cat. No. 6072)  
Nickel Silver (Cat. No. 6073)  
**Body:** Brass, Nickel Plate

| CAT. NO. | D          | P           | H           | T     |
|----------|------------|-------------|-------------|-------|
| 6072     | .175 (4.5) | .531 (13.5) | .937 (23.8) | 6-32  |
| 6073     | .300 (7.5) | .750 (19.1) | 1.12 (28.4) | 10-32 |

## EXTERNAL THREAD



Supplied with nut and lug  
Unassembled



### MATERIAL:


**Spring:** Phosphor Bronze (Cat. No. 6074)  
Nickel Silver (Cat. No. 6075)  
**Body:** Brass, Nickel Plate

| CAT. NO. | D          | P           | H            | S           | T       |
|----------|------------|-------------|--------------|-------------|---------|
| 6074-1   | .175 (4.5) | .531 (13.5) | 1.125 (28.6) | .375 (9.5)  | 6-32    |
| 6074-2   | .175 (4.5) | .531 (13.5) | 1.500 (38.1) | .750 (19.1) | 6-32    |
| 6075     | .300 (7.5) | .750 (19.1) | 1.750 (44.5) | .625 (15.9) | .250-28 |

## STANDARD INSULATED



.175 (4.5)  
Plug

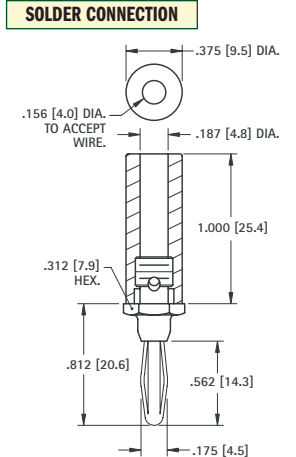

### MATERIAL:


**Spring:** Nickel Silver  
**Body:** Brass, Nickel Plate  
**Handle:** Nylon

| CAT. NO. | COLOR |
|----------|-------|
| 6080     | RED   |
| 6081     | BLACK |

## SWAGE MOUNT



.120 (3.0)  
Plug



**CAT. NO. 452**


### MATERIAL:

**Spring:** Beryllium Copper  
**Body:** Brass, Silver Plate



.120 (3.0)  
Plug

## SOLDER CONNECTION



### MATERIAL:

**Spring:** Beryllium Copper, Nickel Plate  
**Body:** Brass, Nickel Plate  
**Handle:** Nylon


| CAT. NO. | COLOR |
|----------|-------|
| 6076     | RED   |
| 6077     | BLACK |

# BANANA JACKS

## INSULATED SOLDER CONNECTION



Accepts  
.175 (4.5)  
Plug



Supplied with hardware  
Unassembled

| CAT. NO. | HEAD COLOR |
|----------|------------|
| 6093     | RED        |
| 6094     | BLACK      |

### MATERIAL:


**Body:** Brass, Nickel Plate  
**Terminal:** Copper, Tinned  
**Hex Head:** Phenolic

## NON-INSULATED RECESSED HEAD

Fits panel up to .312 (7.9) thick



Accepts  
.175 (4.5)  
Plug



Supplied with nut and lug.  
Unassembled

**CAT. NO. 6095**


### MATERIAL:

**Current Rating:** 15 Amps  
**Body:** Brass, Nickel Plate  
**Terminal:** Brass, Tin Plate

## NON-INSULATED MINIATURE JACK



Accepts  
.120 (3.0)  
Plug



Supplied with lug and nut.  
Unassembled

**CAT. NO. 6090**


### MATERIAL:

**Body:** Brass, Nickel Plate  
**Terminal:** Copper, Tinned

## FULLY INSULATED



Accepts  
.175 (4.5)  
Plug



| CAT. NO. | COLOR |
|----------|-------|
| 6091     | RED   |
| 6092     | BLACK |

### MATERIAL:


**Body:** Nylon  
**Contact:** Brass, Tin Plate

## NON-INSULATED STANDARD HEAD

Fits panel up to .375 (9.6) thick



Accepts  
.175 (4.5)  
Plug



Supplied with nut and lug.  
Unassembled

**CAT. NO. 6096**


### MATERIAL:

**Current Rating:** 15 Amps  
**Body:** Brass, Nickel Plate  
**Terminal:** Brass, Tin Plate

## NON-INSULATED

### MINIATURE

Accepts  
.120 (3.0)  
Plug

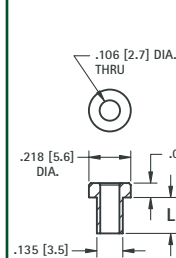


### MATERIAL:

Brass, Tin Plate

| CAT. NO. | L          |
|----------|------------|
| 476-2    | .125 (3.2) |
| 476-3    | .165 (4.2) |
| 476-4    | .187 (4.7) |

### STANDARD

Accepts  
.175 (4.5)  
Plug

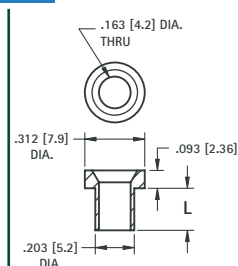

### MATERIAL:

Brass, Nickel Plate

| CAT. NO. | L          |
|----------|------------|
| 575-4    | .218 (5.5) |
| 575-6    | .265 (6.7) |
| 575-8    | .350 (8.9) |