




Designers' Choice

FUSE CLIPS & HOLDERS

9/32 FUSE CLIP



.020 Brass, Nickel Plate
Current Rating: 15 Amps




CAT. NO. 3565

13/32 PC FUSE CLIP



.028 Brass, Tin Plate
Current Rating: 30 Amps

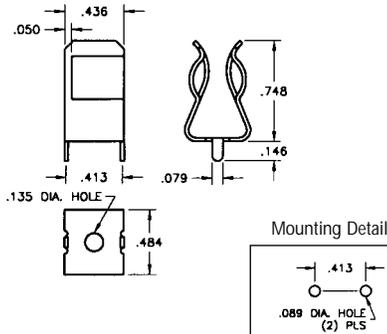

CAT. NO. 3566

CUSTOM FUSE CLIPS & HOLDERS



Keystone is fully integrated to meet your total design & production needs.

Manufacturing custom designs & modifications of standard items is our specialty.

Quotations on special fuse clips & holders furnished promptly upon receipt of sample, sketch, print or CAD drawings.

PC 5mm FUSE HOLDERS

SLIM LINE & (OPTIONAL) COVER

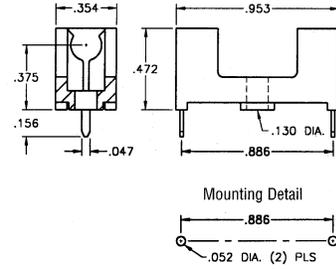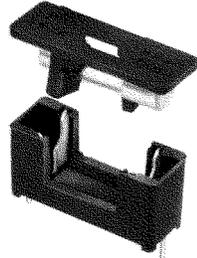



- Optional cover with window protects and insulates fuse

CAT. NO. 4628 – Holder
CAT. NO. 4628C – Cover only (with window)

SPECIFICATIONS

Base & Cover: Nylon, UL94V-0
Contacts: Brass, Tin Plate
Rated: 5 Amp @ 250V

LOW PROFILE & (OPTIONAL) COVER

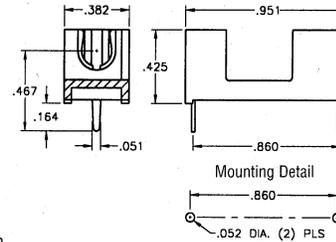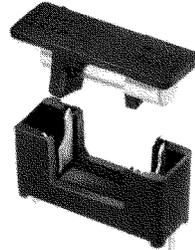


- Low profile, space saving design
- Optional cover protects and insulates fuse

CAT. NO. 4527 – Holder
CAT. NO. 4527C – Cover only

SPECIFICATIONS

Base & Cover: Nylon, UL94V-0
Contacts: Brass, Tin Plate
Rated: 5 Amp @ 250V

PC SNAP-IN FUSE HOLDER

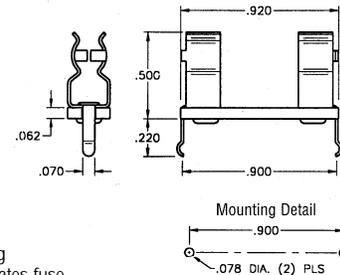

- Low profile, space saving design
- Snap-in design for wave soldering
- Optional cover protects and insulates fuse

CAT. NO. 3527 – Holder
CAT. NO. 3527C – Vinyl cover only

SPECIFICATIONS


Base: .062 G-10, UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 6.3 Amps @ 250V

5mm & 3AG FUSE COVERS




Vinyl

5mm



CAT. NO. 3527C

3AG

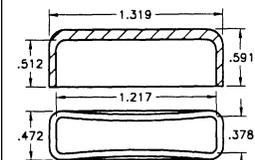


CAT. NO. 4245C



Designers' Choice

2AG & 5mm FUSE CLIPS

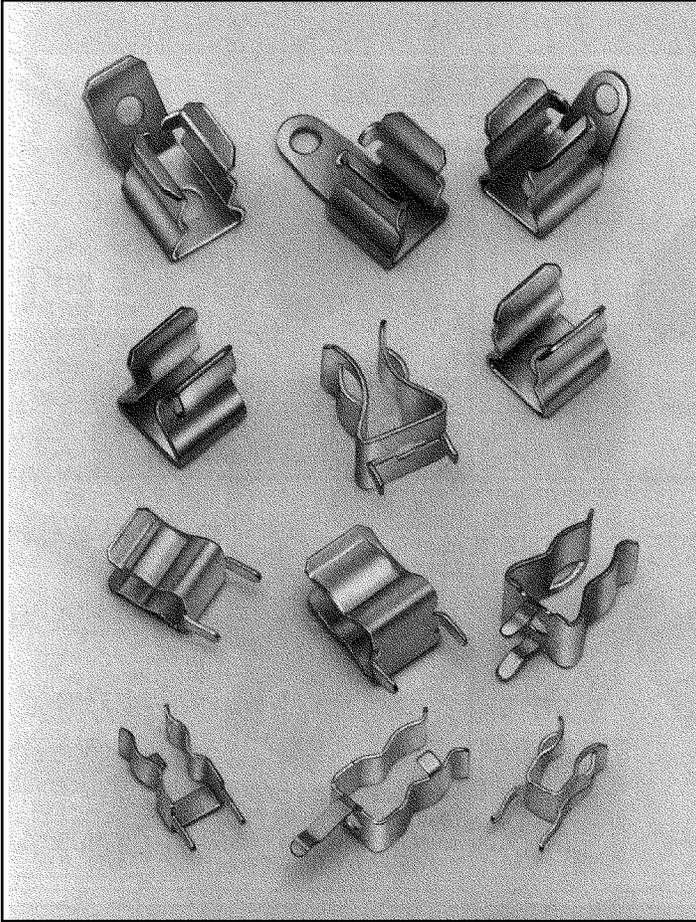

- PC thru mount and rivet types for 2AG, 5mm, 3AG, 9/32 & 13/32 fuse sizes
- Low contact resistance
- Withstands shock and vibration
- Rated 6.3 to 30 Amps
- Custom designs and modifications available to your specifications


PC THRU MOUNT TYPES

- Available for 2AG, 5mm, 3AG & 13/32 sizes
- Low profile, space saving
- Snap-fit design enhances assembly and PC retention for wave soldering
- Available with orientation legs to assure proper PC installation
- Available with or without end stops

RIVET TYPES


- Available for 3AG & 9/32 sizes
- Available with straight or 45° solder lugs
- Available with .187, .205 or .250 or quick fit tabs
- Low profile, space saving
- Available with or without end stops

5mm/3AG PC MULTI-FUSE CLIP

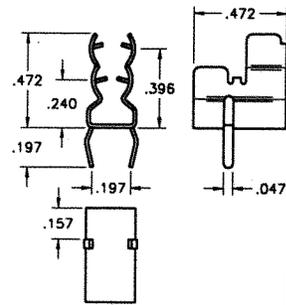


.016 Phosphor Bronze, Tin Plate
Current Rating: 15 Amps

Mounting Detail



CAT. NO. 3562


5mm PC CLIP

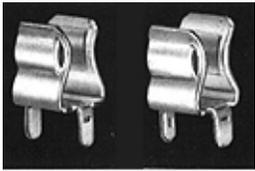

3517 3518P


.020 Brass, Tin Plate
Current Rating: 15 Amps

CAT. NO.	"A"	"B"
3517	.060	.060
3518P	.060	.093

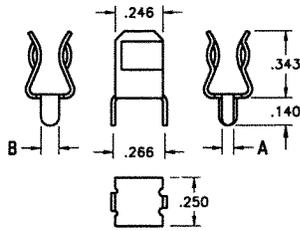

With or Without Orientation Legs


2AG/5mm THM/SMT FUSE CLIP




3521 3561

.016 Brass, Tin Plate
Current Rating: 10 Amps

CAT. NO. 3521 (THM with PC legs)
CAT. NO. 3561 (SMT with Hole)

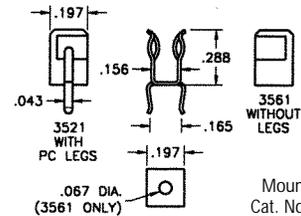

Mounting Detail
Cat. No. 3521 Only




5mm PC CLIP




.016 Brass, Tin Plate
Current Rating: 6.3 Amps

CAT. NO. 3520

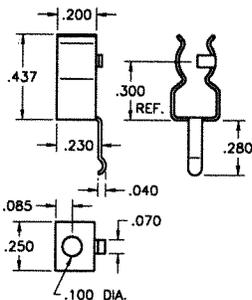


5mm PC CLIP




.016 Brass, Tin Plate
Current Rating: 10 Amps

CAT. NO. 3519

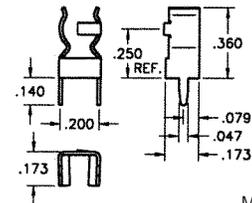

Mounting Detail



3AG (.250") FUSE CLIPS

Designers' Choice




- Snap-In and Press-In design for wave soldering
- Low profile, space saving
- Available with orientation legs
- Available with and without end stops
- Low contact resistance
- Rated 15 Amps
- Economical and easy to assemble


3AG PC CLIP



.020 Brass, Tin Plate.
For 1/4" dia. fuses

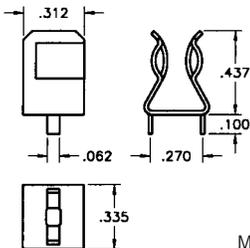

Mounting Detail




CAT. NO. 3530

3AG CLIP WITH SOLDER LUG




3533 3535

.020 Brass, Nickel Plate.
For 1/4" dia. fuses

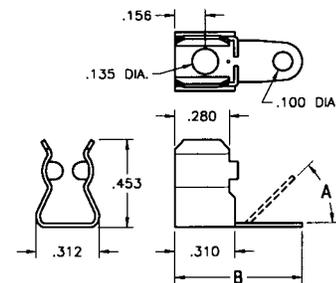


CAT. NO.	A	B
3533	Flat	.656
3535	45°	.562


3AG SNAP-IN PC CLIP



.020 Brass, Tin Plate.
For 1/4" dia. fuses.




Mounting Detail




CAT. NO. 3513

3AG CLIPS WITH QUICK-FIT TAB



.020 Brass, Nickel Plate
For 1/4" dia. fuses

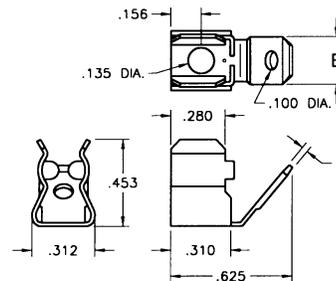


CAT. NO.	A	B
4244	.032	.250
4246	.020	.187
4247	.020	.205


3AG PC CLIPS



.020 Brass, Tin Plate. For 1/4" dia. fuses.




Mounting Detail





CAT. NO.	H	L	END STOPS
3510	.421	.140	NO
3529	.421	.140	YES
3511	.430	.250	NO
3514	.450	.250	YES

3AG FUSE CLIP




.020 Brass, Nickel Plate
For 1/4" dia. fuses




CAT. NO. 3531 – Without End Stops

3AG SNAP-IN PC CLIP

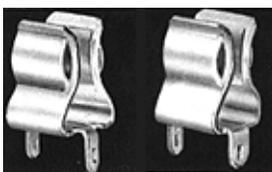


3515 3515P, 3516P

.020 Brass, Tin Plate. For 1/4" dia. fuses.

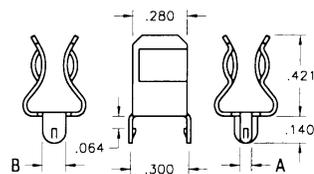


Mounting Detail



CAT. NO.	A	B
3515	.060	.060
3515P	.060	.093
3516P	.060	.120



With or Without Orientation Legs

3AG FUSE CLIP

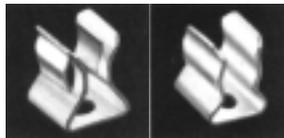

3532 3567

.020 Brass, Nickel Plate
For 1/4" dia. fuses



CAT. NO.	END STOPS
3532	YES
3567	NO

3AG (.250") FUSE HOLDERS

Designers' Choice



UL APPROVED MATERIALS • LOW COST • LOW CONTACT RESISTANCE • FLAME RETARDANT

MOLDED 3AG FUSE HOLDERS

Fuse holder for popular 3AG fuse. Molded with barriers to prevent flashover and withstand test of 1080 VRMS at 60Hz for 1 minute at 3000 VDC for 1 minute.

SPECIFICATIONS


Molded Base: Mineral Filled Flame Retardant Alkyd. UL Rated 94V-0. Conforms to the 180 second arc tracking test specification per ASTM 495-D.
Clips: Brass, Bright Finish

CONTACT RESISTANCE


Will not exceed 50mΩ before and after being in atmosphere of 100% R.H. at 150°F (65°C) for 48 hours, then air dried for 1 hour.



CAT. NO. 3523



CAT. NO. 3524

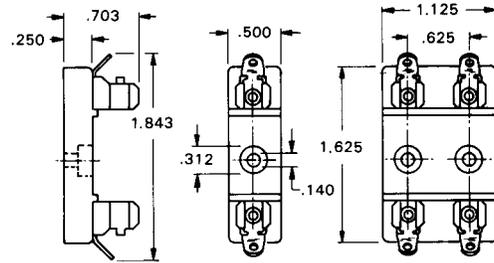


QUICK-FIT 3AG FUSE HOLDER

One piece construction for 1/4" diameter fuses. Quick-Fit Tab, .250 x .032 size, accepts standard .250 quick-fit female terminals. Eliminates the need for soldering.



CAT. NO. 4243

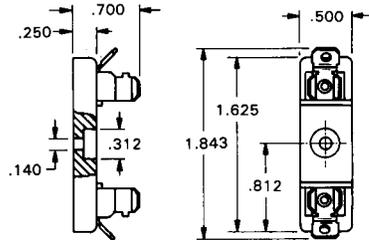

SPECIFICATIONS


Base: Molded Plastic, Flame Retardant, UL Rated 94V-0
Clips: Brass, Nickel Plate

3AG PC FUSE HOLDER

Leads are terminated at bottom of base. One piece construction for 1/4" diameter fuses. Ideal where space is a factor. Provides greater mechanical strength than individual clips.




CAT. NO. 3526

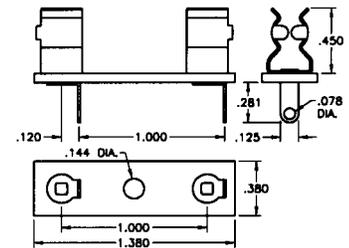

SPECIFICATIONS

Base: .062 GPO-3, UL Rated 94V-0
Lugs & Clips: Brass, Tin Plate



3AG FUSE HOLDERS

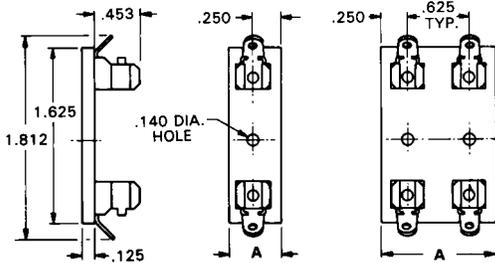


FIG. 1

FIG. 2

SPECIFICATIONS

Black Phenolic Base: .125 thick NEMA Grade XP-FED L-P-509. Max. operating temperature 266°F (130°C) continuous. UL Rated 94-HB.

Fiberglass Base: .125 thick NEMA Grade GPO 3. Max. operating temperature 300°F (148°C) continuous. UL Rated 94V-0.

Clips: Brass, Nickel Plate

ASSEMBLED WITH CLIP NO. 3535


BLACK PHENOLIC CAT. NO.	FIBER-GLASS CAT. NO.	HOLDS NO. OF FUSES	FIG. NO.	A
3536	3540	1	1	.500
3537	3541	2	2	1.125
3538	3542	3	2	1.750
3539	3543	4	2	2.375

3AG PC FUSE HOLDER

One piece construction for 1/4" diameter fuses. Ideal where space is a factor. Economical and compact. Provides greater mechanical strength than individual clips. Ideal for wave soldering.




CAT. NO. 4245

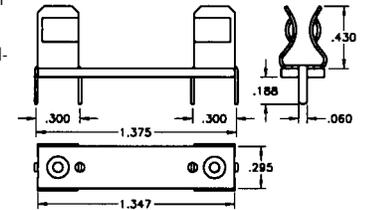


SPECIFICATIONS

Base: .062 GPO-3, UL Rated 94V-0
Clips: Brass, Tin Plate

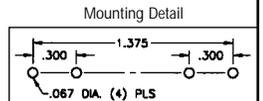


3AG SNAP-IN PC FUSE HOLDER

Snap-In design, ideal for wave soldering. One piece construction for 1/4" diameter fuses. Space saving. Economical and compact. Increases production. Excellent mechanical strength.



CAT. NO. 4250

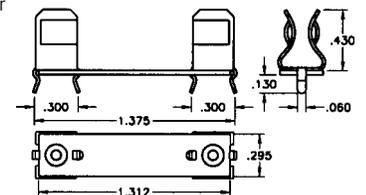

SPECIFICATIONS

Base: .032 G-10, UL Rated 94V-0
Clips: Brass, Tin Plate

