
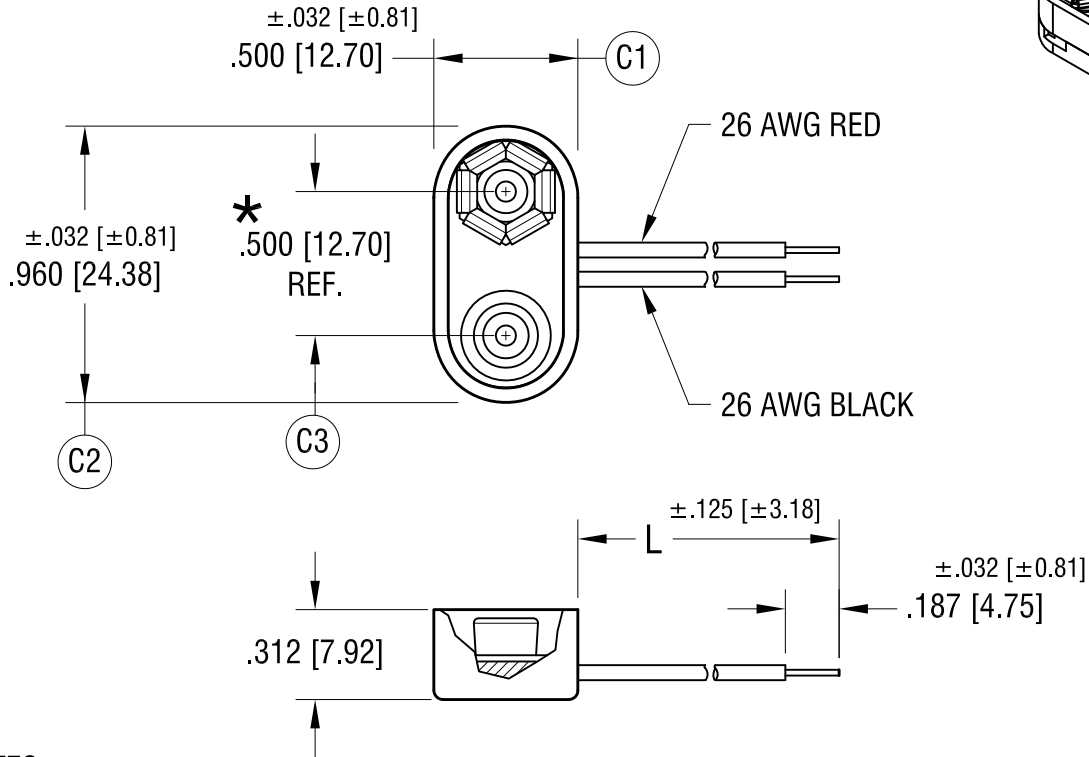


THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE



NOTES:

1. WIRE: 26 AWG, 1007 UL/CSA APPROVED
.052 [1.32] O.D. PVC INSULATION.
RED WIRE CONNECTED TO FEMALE CONTACT;
BLACK WIRE TO MALE CONTACT.
2. BASE: MAT'L- ABS
3. CONTACT: MAT'L- BRASS
FINISH - NICKEL PLATE
4. EYELET: MAT'L- BRASS
5. * REF. DIMENSION MUST FIT
INDUSTRY STANDARD 9 VOLT BATTERY.

PART NO.	'L' DIM.
81-4	4.000 [101.60]
81-6	6.000 [152.40]
81-8	8.000 [203.20]

DATE	DESCRIPTION	REV.
8.11.21	TOLERANCE FOR C1, C2 WAS $\pm .010$ ECN 21-084 ADD C3 & NOTE 5.	C
11.10.03	CHANGE AS PER ECN 03-083	B
4.1.98	CHANGE AS PER ECR 98-020	A

KEYSTONE ELECTRONICS CORP.
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME
SHIELDED 9 VOLT 'T' TYPE BATTERY STRAP

MATERIAL
AS NOTED

FINISH
AS NOTED

DRN BY: BOONE DATE: 1.7.97
APP'D: LN SCALE: 1.5X

TOLERANCES INCH [MM]
DECIMAL $\pm .010$ [± 0.25]
ANGULAR $\pm 1^\circ$
UNLESS OTHERWISE SPECIFIED

CODE: C DWG NO.: **81-**