


FEMALE THREADED STANDOFFS

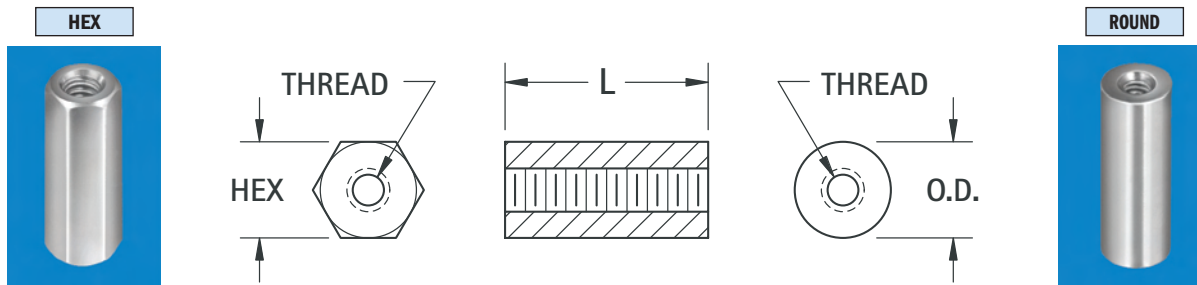

CHOICE OF:			
Stainless: ASTM A581/A582	Brass: per ASTM-B16 Plating: Zinc ASTM B633	Aluminum: ASTM B211 Plating: Clear Iridite Finish (Mil-C-5541)	Phenolic: PBE Grade Natural Color Phenolic

HEX	HEX			LENGTH	ROUND			O.D.
	STAINLESS CAT. NO.	BRASS CAT. NO.	ALUMINUM CAT. NO.		BRASS CAT. NO.	ALUMINUM CAT. NO.	PHENOLIC CAT. NO.	
2-56 THREAD								
.156 (3.9)	—	1798A	1797A	.187 (4.7)	1802A	1801A	—	.156 (3.9)
	—	1798B	1797B	.250 (6.4)	1802B	1801B	—	
	—	1798C	1797C	.312 (7.9)	1802C	1801C	—	
	—	1798D	1797D	.375 (9.5)	1802D	1801D	—	
4-40 THREAD								
.187 (4.7)	—	1450	1891	.250 (6.4)	1547	2025	—	.187 (4.7)
	—	1803	1892	.375 (9.5)	1864	2026	—	
	—	1656	1893	.500 (12.7)	1657	2027	—	
	—	1804	1894	.625 (15.9)	1865	2028	—	
	—	1656A	1895	.750 (19.1)	1657A	2029	—	
	—	1805	1896	.875 (22.2)	1866	2030	—	
	—	1656B	1897	1.000 (25.4)	1657B	2031	—	
.250 (6.4)	1921	1450A	2201	.250 (6.4)	1547A	3478	376	.250 (6.4)
	1921A	1450B	2202	.375 (9.5)	1547B	3479	377	
	1921B	1450C	2203	.500 (12.7)	1547C	3480	378	
	—	1829	1808	.625 (15.9)	1867	1839	—	
	1921C	1450D	2204	.750 (19.1)	1547D	3481	379	
	—	1830	1809	.875 (22.2)	1876	1846	—	
	1921D	1450E	2205	1.000 (25.4)	1547E	3482	380	
	1921E	1831	2206	1.500 (38.1)	1877	3483	381	
1921F	1832	2207	2.000 (50.8)	1878	3484	382		
6-32 THREAD								
.250 (6.4)	1922	1451A	2208	.250 (6.4)	1548A	3485	383	.250 (6.4)
	1922A	1451B	2209	.375 (9.5)	1548B	3486	384	
	1922B	1451C	2210	.500 (12.7)	1548C	3487	385	
	—	1451D	1813	.625 (15.9)	1548D	1847	—	
	1922C	1451E	2211	.750 (19.1)	1548E	3488	386	
	—	1833	1816	.875 (22.2)	1879	1848	—	
	1922D	1635	2212	1.000 (25.4)	1548F	3489	387	
	—	1636	1818	1.250 (31.8)	1881	1853	—	
	1922E	1637	2213	1.500 (38.1)	1882	3490	388	
	—	1638	1819	1.750 (44.5)	1883	1855	—	
	1922F	1639	2214	2.000 (50.8)	1884	3491	389	
	—	1642	1820	2.250 (57.2)	1885	1856	—	
	—	1643	1825	2.500 (63.5)	1886	1857	—	
	8-32 THREAD							
.250 (6.4)	1923	1474A	2215	.250 (6.4)	1692A	3492	390	.250 (6.4)
	1923A	1474B	2216	.375 (9.5)	1692B	3493	391	
	1923B	1474C	2217	.500 (12.7)	1692C	3494	392	
	—	1834	1827	.625 (15.9)	1887	1858	—	
	1923C	1474D	2218	.750 (19.1)	1692D	3495	393	
	—	1836	1828	.875 (22.2)	1888	1859	—	
	1923D	1474E	2219	1.000 (25.4)	1692E	3496	394	
	1923E	1837	2220	1.500 (38.1)	1889	3497	395	
	1923F	1838	2221	2.000 (50.8)	1899	3498	396	
10-32 THREAD								
.312 (7.9)	1475A	1822A	1821A	.375 (9.5)	3499A	3500A	468	.312 (7.9)
	1475B	1822B	1821B	.500 (12.7)	3499B	3500B	469	
	1475C	1822C	1821C	.625 (15.9)	3499C	3500C	—	
	1475D	1822D	1821D	.750 (19.1)	3499D	3500D	470	
	1475F	1822F	1821F	1.000 (25.4)	3499F	3500F	471	

NOTE: All standoffs over 1.000 (25.4) are tapped .375 (9.5) min. both ends, except 4-40 standoffs which are tapped .250 (6.4) min.