



# THM "AUTO" BLADE FUSE HOLDERS

- Accepts Standard Auto Fuses or Low Profile Mini Fuses
- Low insertion force
- Fuse holder fully insulates clips to protect fuse from shorting



### 2 IN 1 FUSE HOLDER

For Standard: Littelfuse: ATO series/Bussmann ATC series.  
For Low Profile: Littelfuse: 891 series/  
Bussmann ATM-LP series




### SPECIFICATIONS

**Contacts:** .016 (.41) Brass, Tin-Nickel Plate  
**Insulator:** High Temp Nylon 46 - UL 94V-0  
**Current Rating:** 20 Amps @ 500V AC  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)

**CAT. NO. 3557-2**


### Mounting Detail



- Holder assures proper spacing and reduces assembly time
- Thru hole PC mountable, maintains position during wave soldering

### MINI FUSE HOLDER

For Mini: Littelfuse: MIN series/  
Bussmann ATM series or equivalent

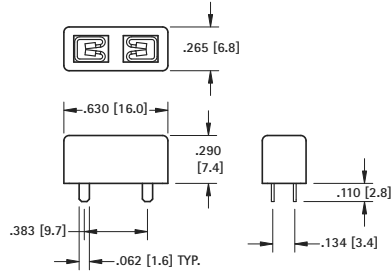


### SPECIFICATIONS

**Contacts:** .016 (.41) Brass, Tin-Nickel Plate  
**Insulator:** High Temp Nylon 46 - UL 94V-0  
**Current Rating:** 20 Amps @ 500V AC  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)


**CAT. NO. 3568**

### Mounting Detail




## STANDARD "AUTO" BLADE FUSE HOLDERS

For Standard: Littelfuse ATO series/Bussmann ATC series or equivalent

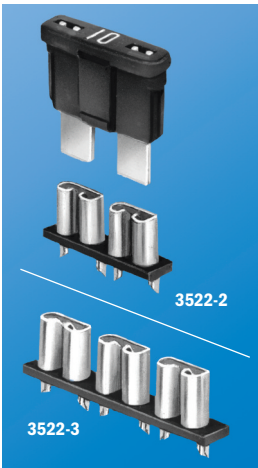


### VERTICAL FUSE ENTRY

- Thru hole PC mountable, maintains position during wave soldering
- Holder design prevents solder wicking
- Withstands the rigors of shock and vibration
- Holds fuse securely, even after multiple insertions




### Mounting Detail




### HORIZONTAL FUSE ENTRY

- Designed for low height clearance applications
- Fuse will be inserted parallel to board
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Polarized legs assure proper orientation of clips onto board

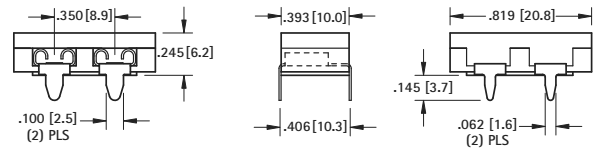

### Mounting Detail



### SPECIFICATIONS

**Contacts:** .012 (.30) Brass, Nickel Plate  
**Insulator:** PBT, UL 94V-0  
**Current Rating:** 30 Amps @ 500V AC  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)

**CAT. NO. 3550-2**

### SPECIFICATIONS

**Contacts:** .016 (.41) Brass, Tin-Nickel Plate  
**Insulator:** Glass filled Nylon, UL 94V-0  
**Current Rating:** 30 Amps @ 500V AC  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)


CAT. NO.	W
3522-2	.760 (19.3)
3522-3	1.125 (28.6)

## MINI "AUTO" BLADE FUSE HOLDER

For Mini: Littelfuse Mini series/Bussmann ATM series or equivalents



### VERTICAL FUSE ENTRY




### SPECIFICATIONS


**Material:** .012 (.30) Brass, Tin Plate  
**Insulator:** Glass filled Nylon, UL 94V-0  
**Current Rating:** 30 Amps @ 500V AC  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)

**CAT. NO. 3544-2**


### Mounting Detail



### Mounting Detail



### HORIZONTAL FUSE ENTRY

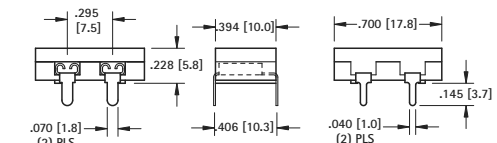

### SPECIFICATIONS

**Contacts:** .012 (.30) Brass, Nickel Plate  
**Insulator:** PBT, UL 94V-0  
**Current Rating:** 30 Amps @ 500V AC  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)

**CAT. NO. 3549-2**

THM "AUTO" FUSE HOLDERS





# SMT "AUTO" BLADE FUSE HOLDERS

- Compatible with most vacuum and mechanical pick and place assembly systems.
- Fully insulated clips to protect fuses against shorting.


- One piece assembly reduces assembly time
- Withstands shock and vibration.

## 2 in 1 FUSE HOLDER

**For Standard:** Littelfuse: ATO series/  
Bussmann ATC series.  
**For Low Profile:** Littelfuse: 891 series/  
Bussmann ATM-LP series







Mounting Detail




## MINI FUSE HOLDER

**For Mini:** Littelfuse: MIN series/  
Bussmann ATM series or equivalent



Mounting Detail



## SPECIFICATIONS

**Contacts:** .016 (.41) Brass, Tin-Nickel Plate  
**Insulator:** High Temperature Nylon 46, UL 94V-0  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)  
**Current Rating:** 20 Amps @ 500V AC

**CAT. NO. 3588 (Bulk)**

**CAT. NO. 3588TR (Tape & Reel)**

**Tape & Reel Spec's:** 32mm wide, 16mm pitch, 13 inch reel (500 pieces per reel)

## SPECIFICATIONS

**Contacts:** .016 (.41) Brass, Tin-Nickel Plate  
**Insulator:** High Temperature Nylon 46, UL 94V-0  
**Temperature Rating:** -58°F to +292°F (-50°C to +145°C)  
**Current Rating:** 20 Amps @ 500V AC

**CAT. NO. 3587 (Bulk)**

**CAT. NO. 3587TR (Tape & Reel)**

**Tape & Reel Spec's:** 32mm wide, 16mm pitch, 13 inch reel (750 pieces per reel)

# SMT "AUTO" BLADE FUSE CLIPS



- Compatible with most vacuum and mechanical pick and place assembly systems.
- Three low profile designs - Thru board - Vertical entry - Horizontal entry.

- Accepts standard and mini blade automotive blade fuses.
- Clip with Matte-Tin plate is ideal for low temperature soldering applications, for other temperature sensitive components.


- Clips with Tin-Nickel plate are ideal for lead free, high temperature soldering applications.

## VERTICAL ENTRY

**For Mini:** Littelfuse: MIN series/Bussmann ATM series.  
**For Standard:** Littelfuse: ATO series/Bussmann ATC series.  
**For Low Profile:** Littelfuse: 891 series/Bussmann ATM-LP series

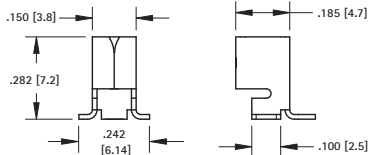

Mounting Detail For Two Clips



## SPECIFICATIONS

**Material:** .016 (.41) Brass, Tin-Nickel Plate  
**Current Rating:** 20 Amps @ 500V AC



**CAT. NO. 3586 (Bulk)**

**CAT. NO. 3586TR (Tape & Reel)**


**Tape & Reel Spec's:** 16mm wide, 12mm pitch, 13 inch reel (750 pieces per reel)

## VERTICAL ENTRY

**For Mini:** Littelfuse: MIN series/Bussmann ATM series or equivalent

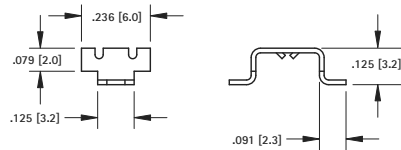

Mounting Detail For Two Clips



## SPECIFICATIONS

**Material:** .016 (.41) Brass, Matte Tin Plate  
**Current Rating:** 30 Amps @ 500V AC




**CAT. NO. 3563 (Bulk)**

**CAT. NO. 3563TR (Tape & Reel)**


**Tape & Reel Spec's:** 24mm wide, 12mm pitch, 13 inch reel (1500 pieces per reel)

## HORIZONTAL ENTRY

**For Mini:** Littelfuse: MIN series/Bussmann ATM series or equivalent

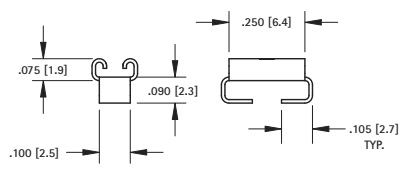

Mounting Detail For Two Clips



## SPECIFICATIONS

**Material:** .012 (.30) Brass, Tin-Nickel Plate  
**Current Rating:** 15 Amps @ 500V AC

**CAT. NO. 3569 (Bulk)**

**CAT. NO. 3569TR (Tape & Reel)**

**Tape & Reel Spec's:** 24mm wide, 8mm pitch, 13 inch reel (2000 pieces per reel)