

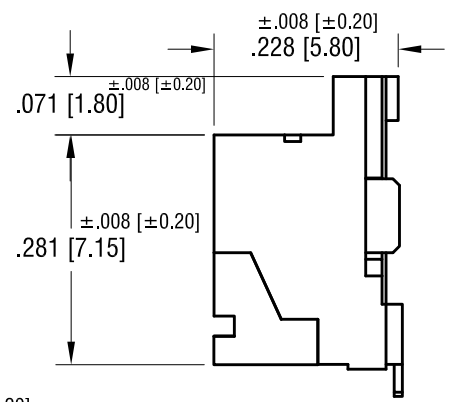
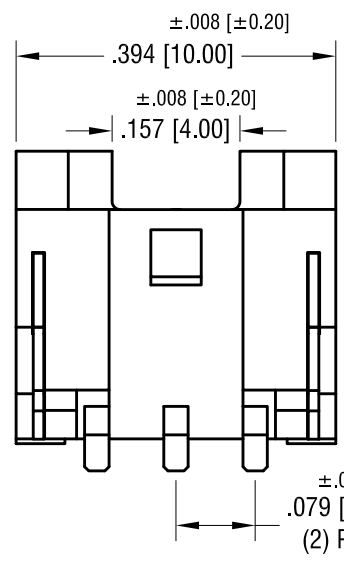



THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

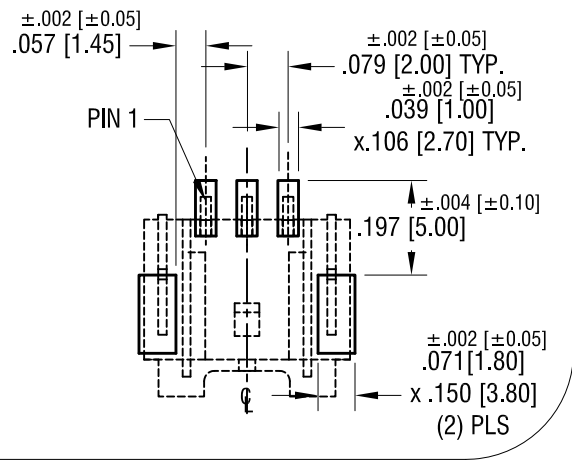

ACTUAL SIZE



- NOTE:
1. INSULATION: MAT'L- NYLON 6T  
UL94V-0
  2. POST: MAT'L- BRASS  
FINISH TIN

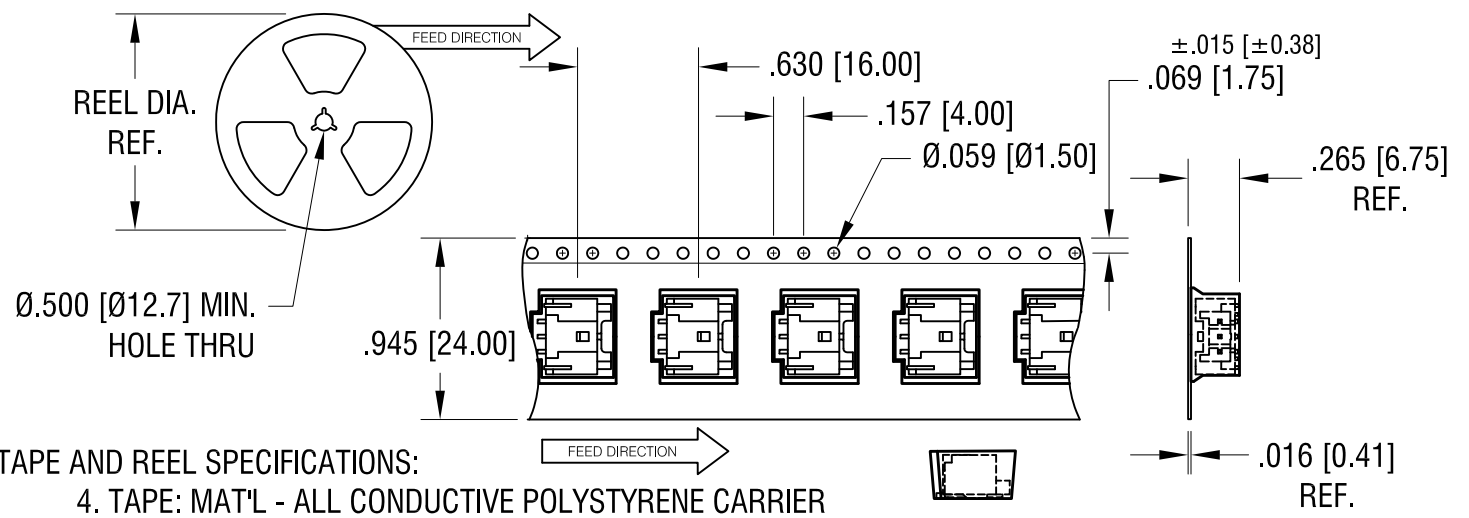

- TAPE AND REEL SPECIFICATIONS:
4. TAPE: MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER  
ANSI/EIA-481 STANDARD
  5. REEL: 15.0 [380.8] DIA. 1000 PIECES PER REEL

|  |                 |        |            |
|--|-----------------|--------|------------|
| <b>KEYSTONE ELECTRONICS CORP.</b>                              |                 |        |            |
| www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500 |                 |        |            |
| PART NAME  |                 |        |            |
| SM SIDE ENTRY CONNECTOR (3 CIRCUITS)                           |                 |        |            |
| MATERIAL   |                 |        |            |
| AS NOTED   |                 |        |            |
| FINISH   |                 | DRN BY | DATE       |
| AS NOTED   |                 | NT     | 3.07.16    |
|  |                 | APP'D  | SCALE      |
|  |                 | RH     | 6X         |
| TOLERANCES   | INCH [MM]       | CODE   | DWG NO.    |
| DECIMAL  | ± .005 [± 0.13] | C      | <b>976</b> |
| ANGULAR  | ± 1°            |        |            |
| UNLESS OTHERWISE SPECIFIED                                     |                 |        |            |

|          |   |      |
|----------|---|------|
| 12.17.24 | UPDATED FEATURES.<br>UPDATED DIMENSIONS&TOLERANCES. | B    |
| 6.18.21  | CHANGE AS PER ECN 21-055                            | A    |
| DATE     | DESCRIPTION   | REV. |