THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

MTG LAYOUT

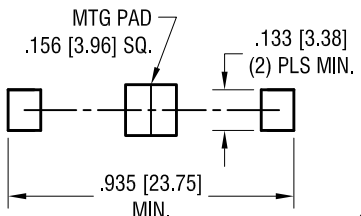

ACTUAL SIZE

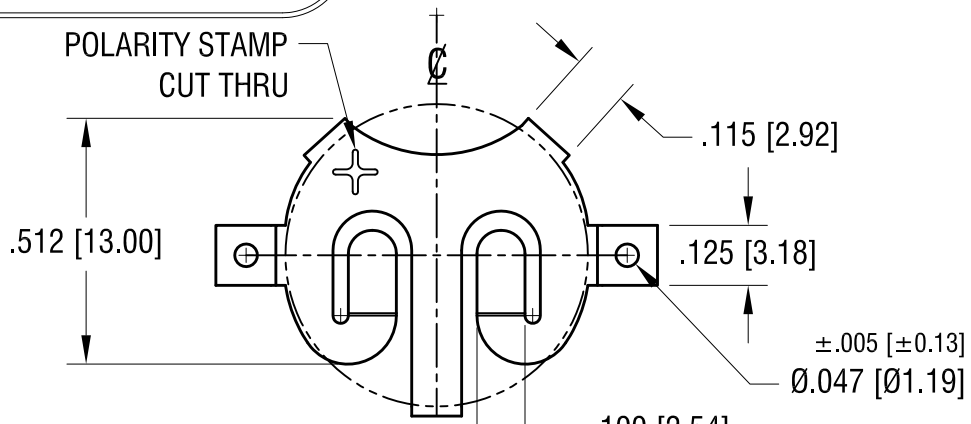

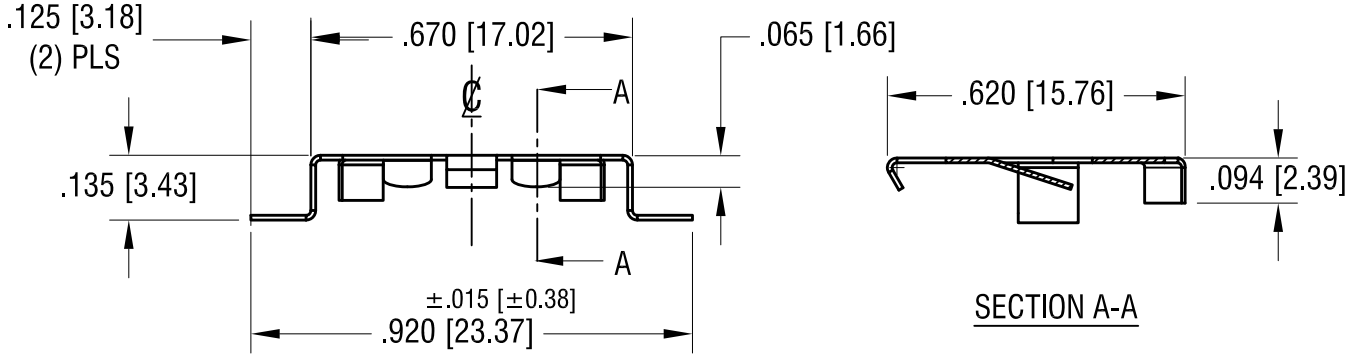

SECTION A-A

NOTE:

1. NO DISLODGMENT OF THE CELL OR DAMAGE TO RETAINER WITH THE FOLLOWING TESTS:
   a) INTEGRITY VIBRATION TEST PER MIL-STD-810G METHOD 516.6
   b) SHOCK TEST PET MIL-STD-810G METHOD 516.6
   c) BENCH HANDLING SHOCK TEST PER MIL-STD 810G METHOD 516.6
   d) TRANSIT DROP TEST PER MIL-STD 810G METHOD 516.6

DATE	DESCRIPTION	REV.
3.30.20	ADDED NOTE 1. CHANGE AS PER ECN 20–031	B
5.13.19	REMOVE DIMPLES CHANGE AS PER ECN 19–051	A

KEYSTONE ELECTRONICS CORP.

www.keyelco.com ● NEW HYDE PARK, NY 11040● Tel (516) 328-7500

PART NAME: 1632 COIN CELL SM RETAINER			
MATERIAL: .010 [0.25] TH'K PHOSPHOR BRONZE			
FINISH: TIN NICKEL PLATE	DRN BY: NT	DATE: 9.19.18	
	APP'D: RH	SCALE: 2.5X	
TOLERANCES INCH [MM] DECIMAL ± .010 [± 0.25] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	CODE: C	DWG NO.: 2896	