
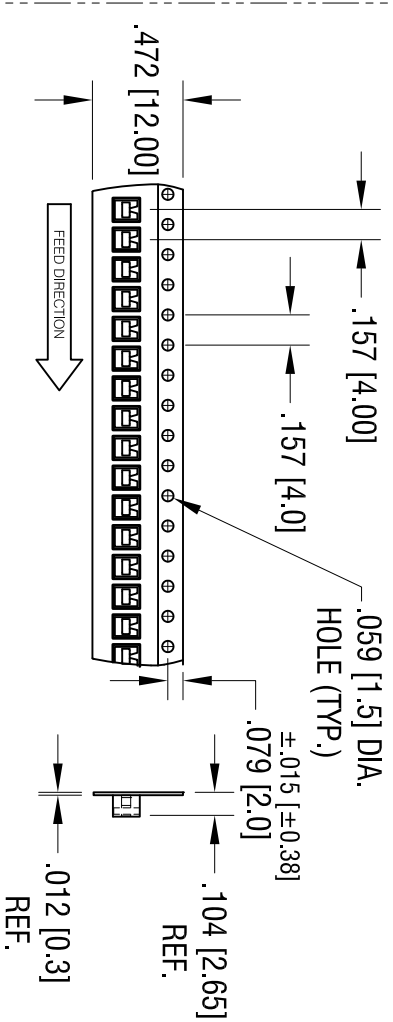
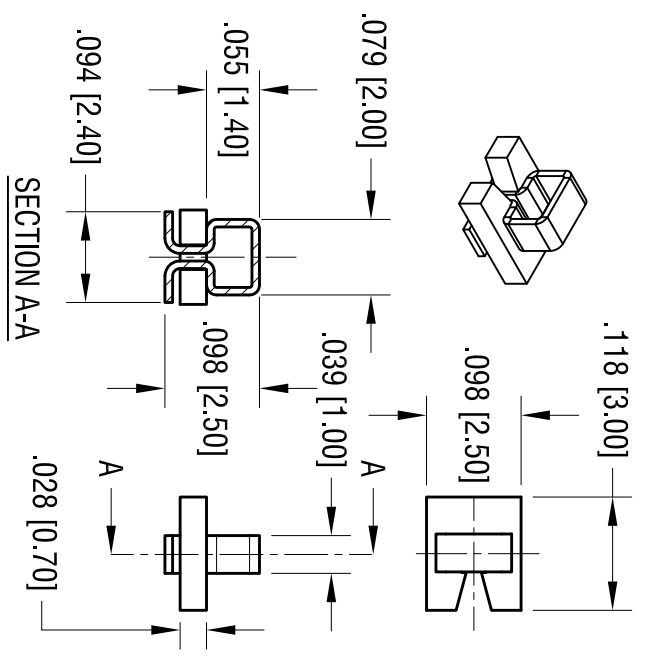


DATE	DESCRIPTION	REV.
6.27.19	CHANGE AS PER ECN 19-060 ROTATE TEST POINT IN THE POCKET FOR 90°	A
7.29.19	CHANGE AS PER ECN 19-062 INSULATION MAT'L WAS PA6T	B

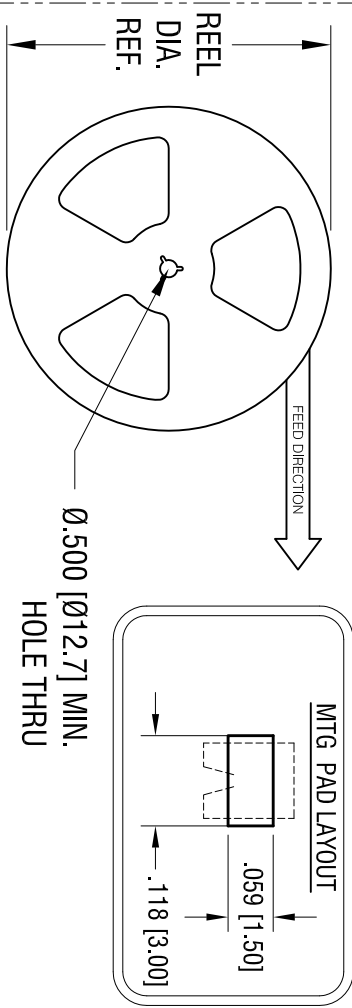

PART NO.	BASE COLOR	PART NO.	BASE COLOR
5190TR	RED	5195TR	BROWN
5191TR	BLACK	5196TR	GREEN
5192TR	WHITE	5197TR	BLUE
5193TR	ORANGE	5198TR	GREY
5194TR	YELLOW	5199TR	PURPLE

- NOTES:
- SUPPLIED ON TAPE AND REEL ONLY.
 - TAPE AND REEL SPECIFICATIONS:
 - TAPE:
 - MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
 - ANSI/EIA-481 STANDARD
 - REEL:
 - 7" [180.0] DIA. 1000 PIECES PER REEL

- TEST POINT SPECIFICATIONS:
- CONTACT:
 - MAT'L -.008 [0.20] THK PHOSPHOR BRONZE
 - FINISH: SILVER PLATE
 - INSULATOR:
 - MAT'L -LCP, UL 94V-0
 - (SEE COLOR IN THE TABLE)

KEYSTONE ELECTRONICS CORP.
www.keystoneelectronics.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME: TEST POINT
MATERIAL: AS NOTED

FINISH: AS NOTED
TOLERANCES: INCH [MM]
DECIMAL ± .005 [± 0.13]
ANGULAR ± 1°

CODE: C
DWG NO.: 5190TR-5199TR
DRN BY: NT
DATE: 2.26.19
APP'D: RH
SCALE: 5X

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.