
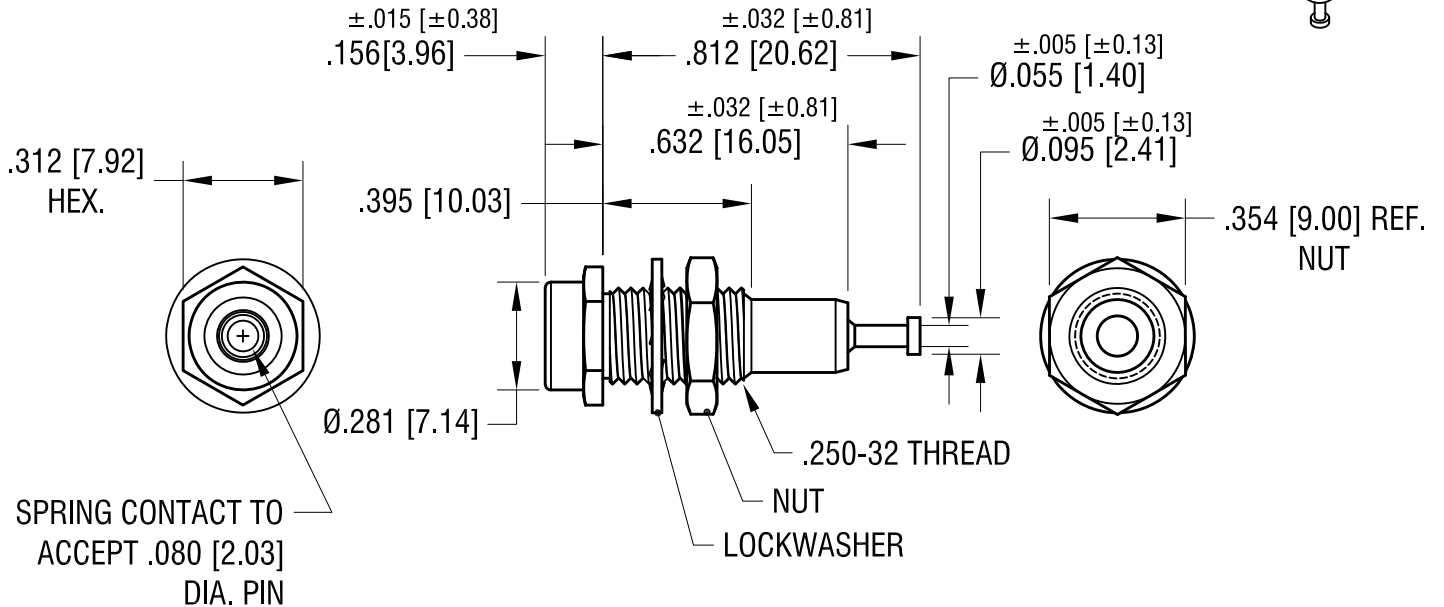


THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

RATINGS:

CURRENT: 10 AMPS
 BREAKDOWN VOLTAGE: 5700 V RMS
 CONTACT RESISTANCE: 0.004 OHMS MAX.
 CONTACT-TO-PANEL C: 2 pF NOMINAL

ACTUAL SIZE



NOTES:

- CONTACT:
 MAT'L - BRASS BODY WITH WRAP AROUND BERYLLIUM COPPER GOLD PLATE
- INSULATOR:
 MAT'L - NYLON 6/6 PER ASTM D4066
- SHELL, NUT/WASHER:
 BRASS, NICKEL PLATE.
 HARDWARE SUPPLIED UNASSEMBLED.

PART NO.	COLOR
6012	WHITE
6013	RED
6014	BLACK
6015	GREEN
6016	YELLOW
6017	BLUE

DATE	DESCRIPTION	REV.
4.08.25	NO CHANGES TO PART.	C
3.30.23	NUT WAS 8.71mm±0.15mm GENERAL TOLERANCE WAS ±.005 CHANGE AS PER ECN 23-041	B
2.05.03	CHANGE AS PER ECN 03-011	A

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK NY 11040 • Tel (516)328-7500			
PART NAME INSULATED METAL-CLAD TIP JACK			
MATERIAL AS NOTED			
FINISH AS NOTED		DRN BY BOONE	DATE 12.07.82
		APP'D RH	SCALE 2X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	±.010 [±0.25]	C	6012 - 6017
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			