


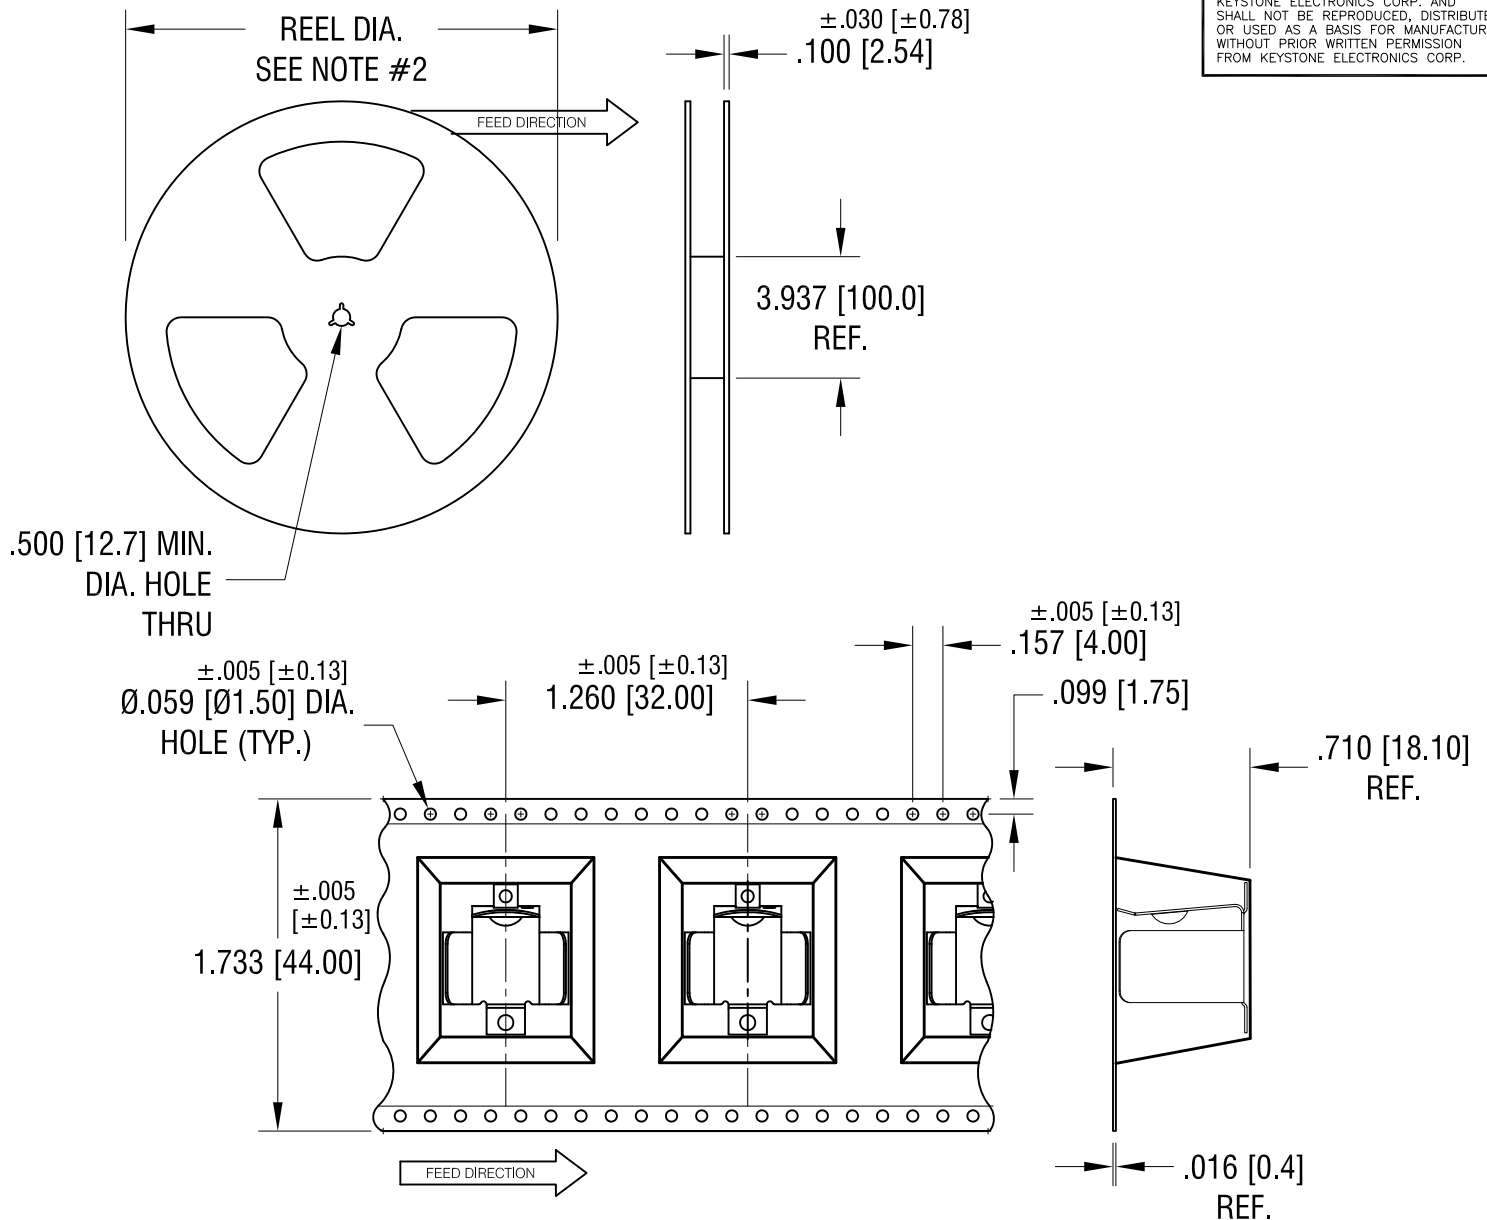

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD

2. REEL:


15.0 [380.8] DIA. 75 PIECES
OF PART NO. 254 REV.C PER REEL.

9.15.23	P/N 254 REVISED TO REV.C POCKET DESIGN FOR NEW REV.C CHANGE AS PER ECN 23-157	B
9.20.18	ROTATE POCKET ON 180° CHANGE AS PER ECN 18-036	A
DATE	DESCRIPTION	REV.


KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
BATTERY HOLDER ON TAPE AND REEL			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	3.01.18
TOLERANCES		APP'D	SCALE
INCH [MM]		RH	X
DECIMAL		DWG NO.	
ANGULAR ± 1°		C	
UNLESS OTHERWISE SPECIFIED		254TR	

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE




MOUNTING LAYOUT

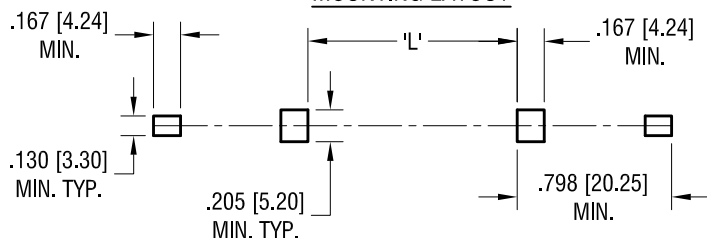

BATTERY	'L'
CR123A	.144 [3.66] MAX.
18350	.197 [5.00] MAX.
18650 ★	1.46 [37.00] MAX.
17500	2.05 [52.00] MAX.

★ FOR BATTERIES WITH
BUILT-IN CIRCUIT PROTECTION
(67mm LONG)

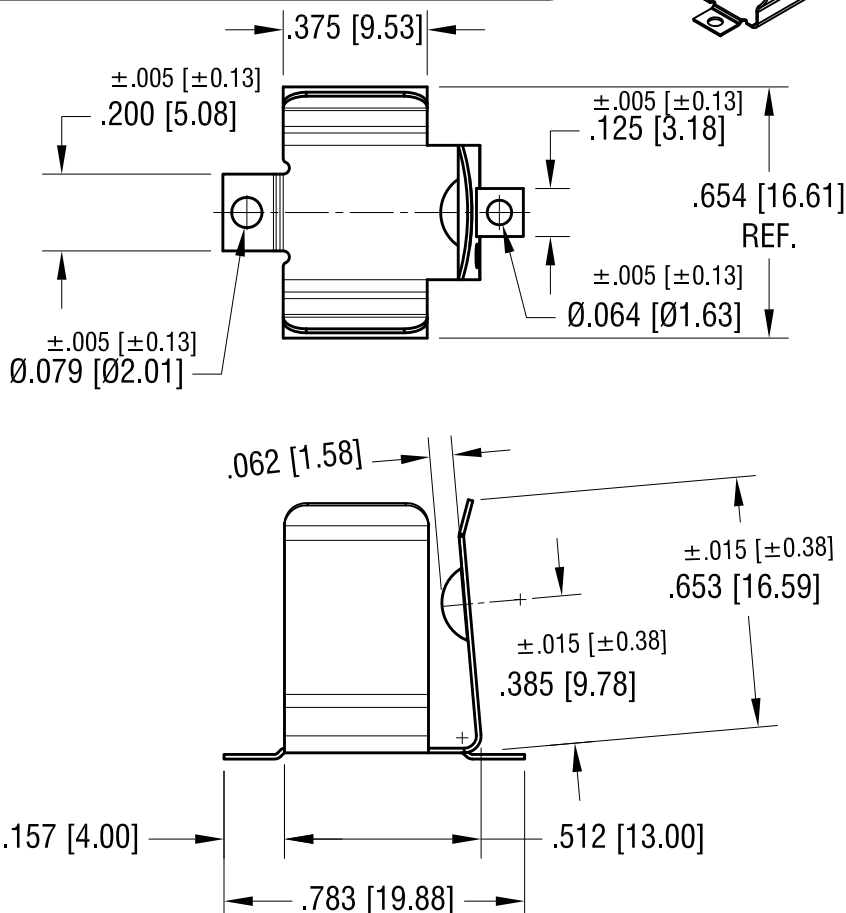

NOTE:

1. HEAT TREAT TO SPRING TEMPER

PCB PROTECTION CIRCUITS ARE REQUIRED
WHEN USED WITH LITHIUM-ION BATTERIES

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

9.14.23	MTG. SOLDER CONTACTS REMOVED CHANGE AS PER ECN 23-154	C
8.15.22	B1 WAS .060, ADD RELIEF B2 CHANGE AS PER ECN 22-141	B
6.14.21	REMOVE HOLE FOR WIRE CHANGE AS PER ECN 21-053	A
DATE	DESCRIPTION	REV.

PART NAME 16mm - 19mm SM BATTERY CLIP		
MATERIAL .012 [0.30] TH'K ANNEALED SPRING STEEL		
FINISH TIN NICKEL PLATE	DRN BY NT	DATE 1.17.18
	APP'D RH	SCALE 2X
TOLERANCES INCH [MM] DECIMAL ±.010 [±0.25] ANGULAR ± 2° UNLESS OTHERWISE SPECIFIED	CODE C	DWG NO. 254