
THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

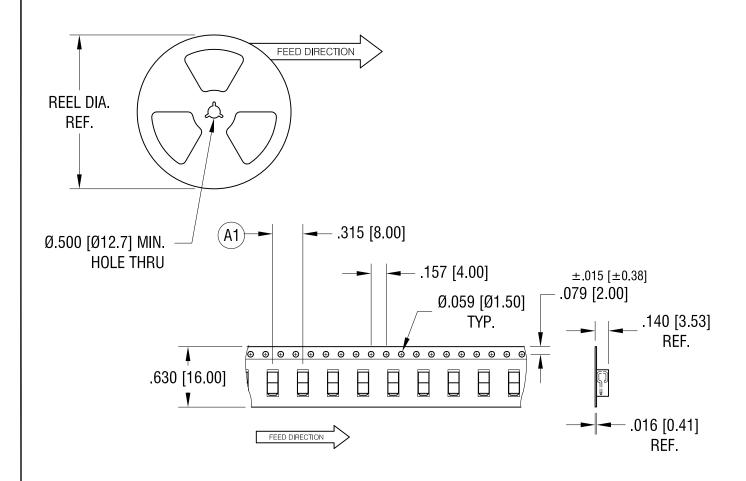

NOTES:

1. SUPPLIED ON TAPE AND REEL ONLY.

TAPE AND REEL SPECIFICATIONS:

2 TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER ANSI/EIA-481 STANDARD

3. REEL:

13.00 [330.0] DIA. 1000 PIECES OF P/N 3579 PER REEL

			KEYSTONE ELECTRONICS CORP. www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500		
		PARALLEL FITTING PIN ON TAPE AND REEL			
9.04.20	WAS 500 PCS PER REEL CHANGE AS PER ECN20-075	В	MATERIAL AS N	OTED Torn by	DATE
	REEL DIA. WAS 7.0" PITCH (A1) WAS .157 [4.00] CHANGE AS PER ECN 20-068		AS NOTED	APP'D LN	3.08.19 SCALE X
7.24.20	CHANGE AS PER ECN 20-068	A	TOLERANCES INCH [MM] CODE DECIMAL ± .005 [± 0.13]	DWG NO.	
DATE	DESCRIPTION	REV.	ANGULAR ± 1° C	35	579TR