If you do not find the spacer or standoff you are looking for, please visit our Parts Builder on our Website (**www.keyelco.com**). Many non-catalog items are readily available from stock. Fill out this form and we will make your standoff to your exact specifications with a minimum lot of 1,000 pieces.

CLEAR SPACERS

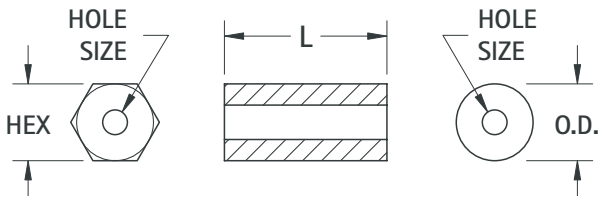

HEX	L	HOLE	O.D.

MATERIAL:

FINISH:

QUANTITIES TO QUOTE:

THREADED STANDOFFS

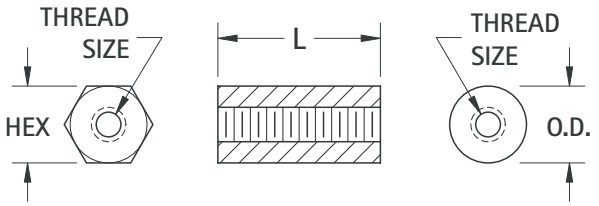

HEX	L	THREAD	O.D.

MATERIAL:

FINISH:

QUANTITIES TO QUOTE:

MALE/FEMALE STANDOFFS

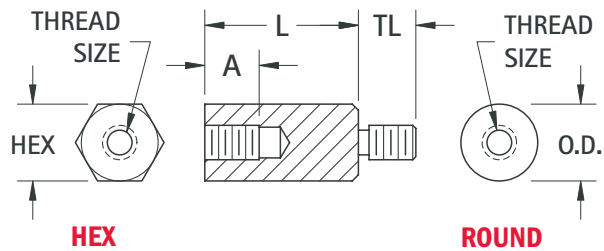

HEX	L	A	TL	THREAD	O.D.

MATERIAL:

FINISH:

QUANTITIES TO QUOTE:

FOR PROMPT QUOTATIONS
FAX, MAIL OR E-MAIL A COPY OF THIS WORKSHEET.

NAME: _____

COMPANY: _____

ADDRESS: _____

_____

PHONE: _____ FAX: _____

E-MAIL: _____

ENGINEERING DATA

Clearance Hole	
For Screw Sizes	Hole Sizes
#2	.093 (2.4)
#4	.119 (3.0)
M3	.125 (3.2)
#6/M3.5	.145 (3.7)
#8/M4	.171 (4.4)
#10	.197 (5.0)

Material Code	MATERIALS
AL	Aluminum - QQ-Q-225/3
BR	Brass - ASTM-B16
NV0	Nylon 6/6 - UL Rated 94V-0
NV2	Nylon 6/6 - UL Rated 94V-2
PH	Phenolic - PBE Natural Color
SS	Stainless Steel - ASTM-A581/A582
S	Steel - ASTM-108
O	Other - Specify

Thread Depth Reference		
Thread	A	TL
2-56	.187 (4.8)	.156 (4.0)
4-40/M3	.250 (6.3)	.187 (4.8)
6-32/M3.5	.375 (9.5)	.250 (6.3)
8-32/M4	.437 (11.1)	.375 (9.5)
10-32	.500 (12.7)	.375 (9.5)

If you have any questions, please contact our application engineers

Finish Code	FINISHES
AB	Anodize (Black) - MIL-A-8625
AC	Anodize (Clear) - MIL-A-8625
IC	Iridite (Clear) - MIL-C-5541
IG	Iridite (Gold) - MIL-C-5541
N	Nickel - QQ-N-290
P	Passivate - MIL-S-5002
T	Tin - MIL-T-10728
TLD	Tin-Lead - MIL-S-5002
ZC	Zinc (Clear) - ASTM-B633
ZG	Zinc (Gold) - ASTM-B633
O	Other - Specify

CREATE YOUR OWN CONFIGURATION

MATERIAL: **FINISH:**

QUANTITIES TO QUOTE:

CUSTOM DESIGN WORKSHEET